

VertEx VAI316

Specification

Construction: Fully Welded 1.2mm Steel Panel
Finish: Powder coated grey
Filtration: Selected to suit the application
Filter Access: To front

Power supply: 13a Single Phase (3 phase available as option)
Power consumption: 1.2kw

Monitoring: Filter loss gauge to front

Controls: On/off switch or optional variable speed control

Face velocity: >2m/s



Exhaust: Upwards via louvred grille or to ductwork.

Filtration

VertEx is available with the following standard filter configurations:

- A Non sparking dusts
- H Fine non sparking dusts
- B Very fine non sparking dusts
- L HEPA filtration
- E Low volume fume
- C Light sparks

See separate datasheets for more information.

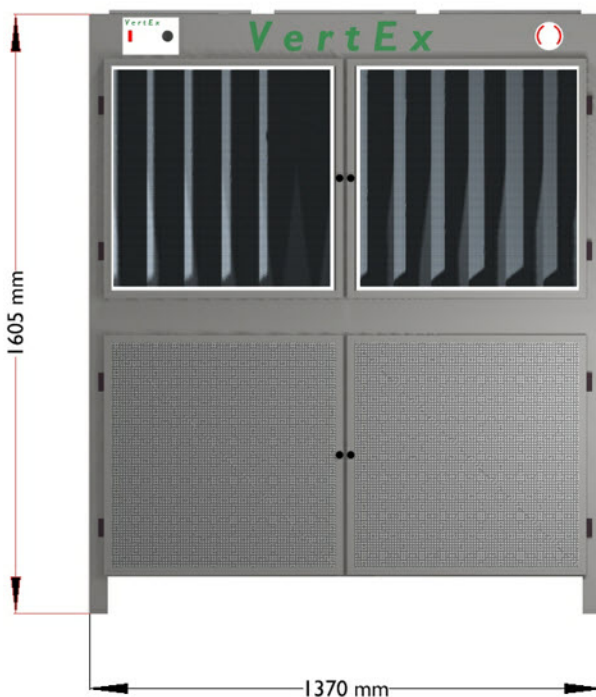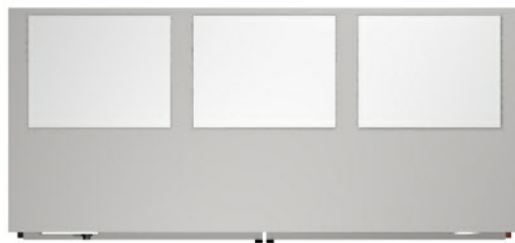

Specifications and Prices are Subject to Change Without Notice. All Dimensions Nominal, excluding doors and outlets.