



AirBench FPK



Controls

On/off switch or optional speed control wired to standard 13a plug for rapid installation.




Filter monitoring

By differential pressure gauge



Body

2mm steel plate, fully welded and powder coated.



Fan

High powered centrifugal fan
* 2 fans in larger units.




Filters

Selected to suit the application from the full AirBench range.



Filter removal

Quickly and simply by removing the top surface.
Filters are positively clamped against soft rubber seals.

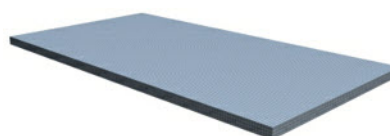

Surface

Heavy duty 3mm perforated steel plate with 4mm dia perforations, powder coated.
* In multiple sections on 975 deep units.



+44 (0) 1206 791191

sales@airbench.com

www.airbench.com

14 Grange Farm Road, Colchester CO2 8JW






Available Models


FPK069084

Fan Type Forward Curved Centrifugal
Fan Power 170w
Airflow 1000 m³/h - 1.5m/s at surface
Dimensions 674 x 960 x 840 mm
Actual Ventilated Area 610 x 650 mm

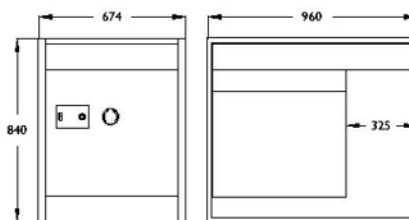


FPKI29084

Fan Type Forward Curved Centrifugal
Fan Power 550w
Airflow 2000 m³/h - 1.5m/s at surface
Dimensions 1274 x 960 x 840 mm
Actual Ventilated Area 1210 x 650 mm

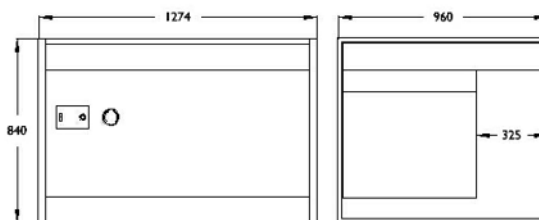

FPKI89084

Fan Type Forward Curved Centrifugal
Fan Power 570w
Airflow 3000 m³/h - 1.5m/s at surface
Dimensions 1874 x 960 x 840 mm
Actual Ventilated Area 1810 x 650 mm

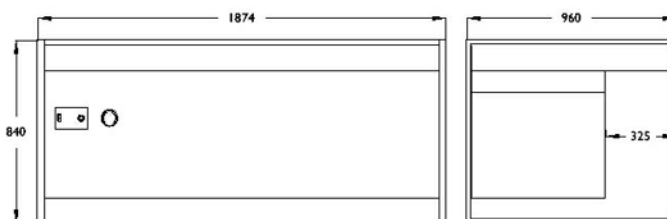

Available Filter Configurations

- A: Dust
- H: Fine Dust
- F: Fine Dust - Two Stage
- B: Very Fine Dust
- L: HEPA Filtered
- E: Fume in Low Volumes
- S: Solder Fume
- C: Dust with some sparks

General

Power Supply 240v, Single Phase - 110v available
Surface Loading 150kg - Higher loadings on request

Finish Textured grey powder coat - other finishes on request
Noise Level 63dBa average across range

Specifications vary for some filter configurations - "A" configuration shown.

Dimensions nominal; specifications subject to change.



+44 (0) 1206 791191

sales@airbench.com

www.airbench.com

14 Grange Farm Road, Colchester CO2 8JW

