# // AIRBENCH BD

BLOWDOWN STATION

## // FEATURES

- Blowdown station for coolant and swarf
- Used for cleaning of parts after machining.
- Compressed air powered.
- Complies with HSG258

## // CONSTRUCTION

- All steel body, fully welded
- Powder coated
- Perspex screen for operator protection.
- Removable swarf bin with 2-stage filter.
- Colour scheme to match your machine tool if required.

## // APPLICATIONS

Removal of coolant and swarf from machined parts.

MIST EXTRACTION

# // AIRBENCH BD

FEATURES

### // THE BLOWDOWN STATION FOR COOLANT AND SWARF

BD500 and BD1000 are designed to stop operators blowing coolant and swarf into your workspace.

### // COMPACT SELF-CONTAINED STATION

BD runs completely from compressed air, so requires no electrical power.

### // AIRGUN ATTACHMENT

Airgun for operator use to dislodge swarf and coolant

### // FOOT PEDAL OPERATION

Foot pedal operates venturi and allows airgun to function on demand.

### // REMOVABLE SWARF BIN

Swarf bin is easily removed and emptied; the bin contains a 2-stage filter system to capture most particulates before returning air to the workspace.

# // AIRBENCH BD

## DIMENSIONS

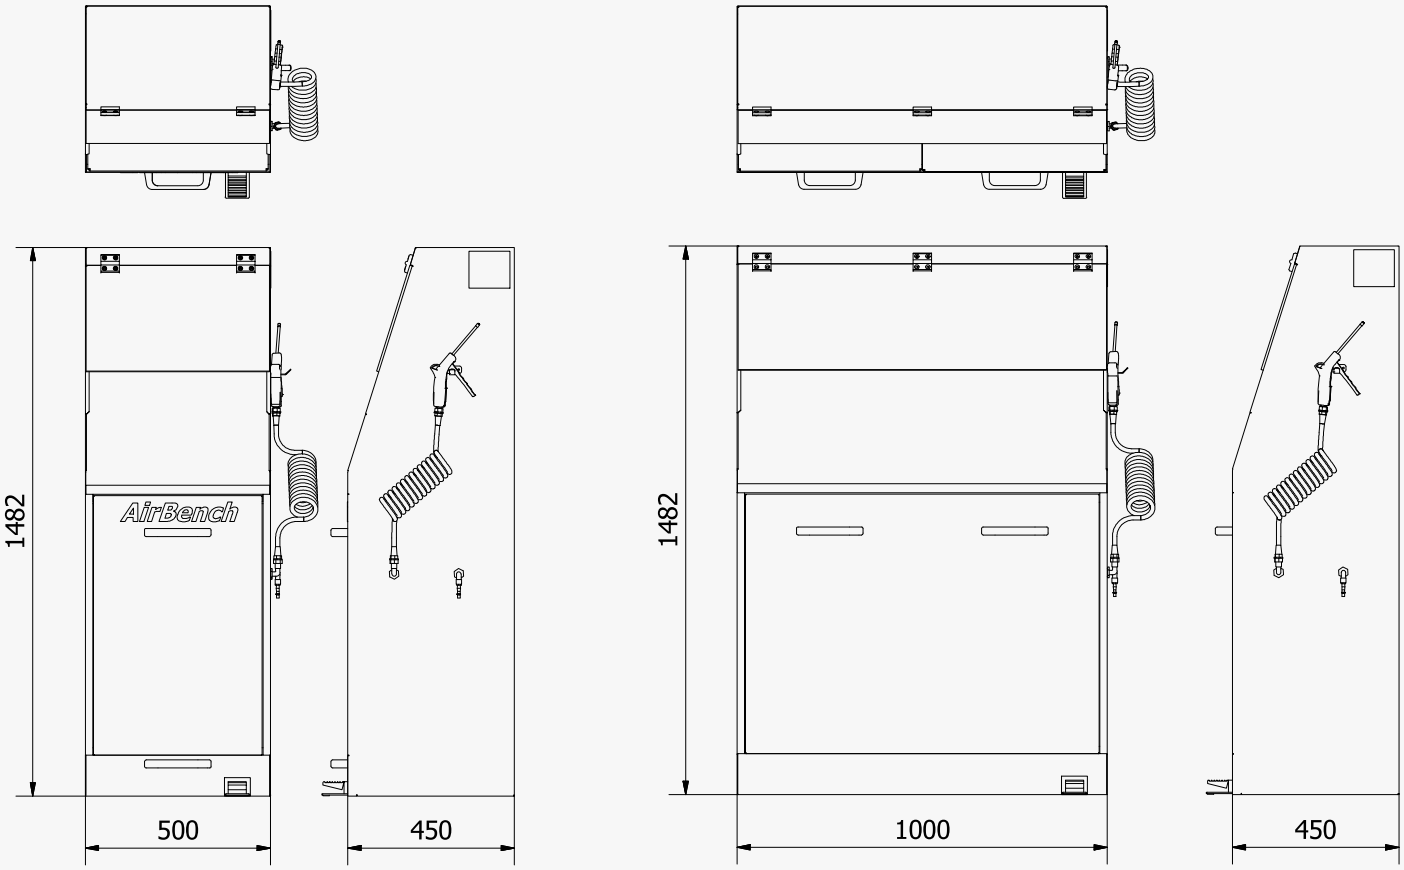


## // TECHNICAL DATA

| MODEL | WIDTH A | OVERALL DEPTH B | HEIGHT C |
|---|---|---|---|
| BD500 | 500 | 450 | 1482 |
| BD1000 | 1000 | 450 | 1482 |

## // GENERAL

| | | | |
|---|---|---|---|
| **POWER SUPPLY** | Compressed air only | **AIR INLET** | Series 25 (BD500: 1/4". BD1000: 3/8") |
| **NOISE LEVEL** | <80dBA at 1m | **FINISH (STD)** | BS00A05 Texture |